




MAKE

ABS CASING BOX TYPE WOUND PRIMARY METERING CT.

Type	ABS CASING WOUND PRIMARY METERING CT.
Availability	ON ORDERING



General Specifications	
Standards	IS 2705, IEC 60044-1
Insulation Class	E (120° C)
Maximum Service voltage	0.66 kV
Frequency	50/60 Hz
Insulation Level : 3 kv for 1 minute	
S.T.C. Rating : 50x In KArms For 1 Sec. (In : Rated Primary Current.)	

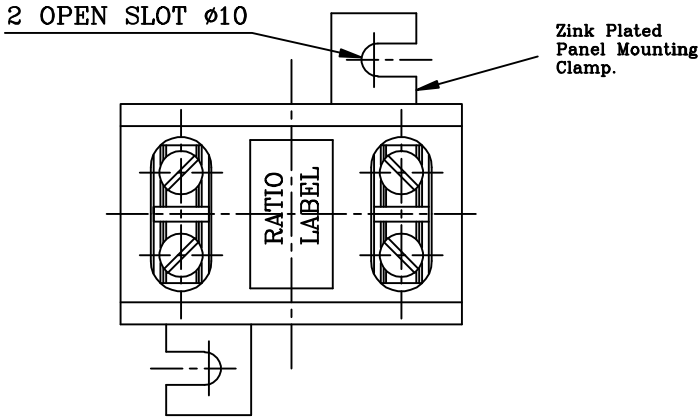

K & L : Primary Connetion
k & l : Secondary Connetion

PLAN

Primary & Secondary Tterminals M5.

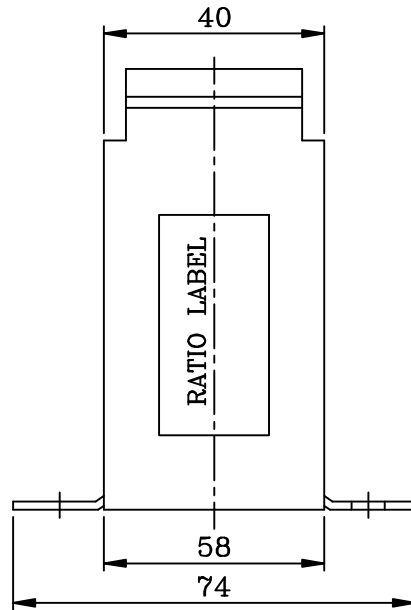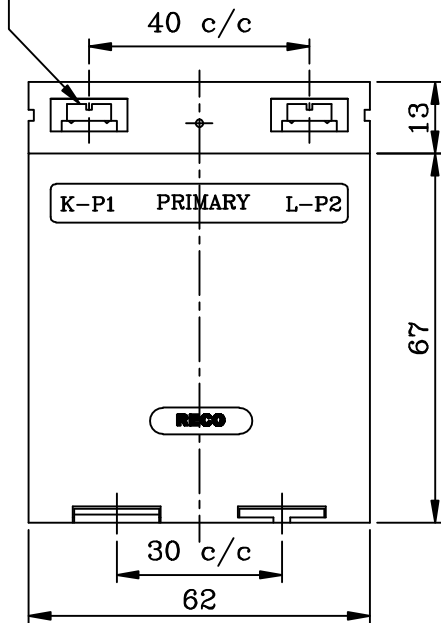

ELEVATION

SIDE VIEW

Features:


1. Din Rail Fitting Arrangement.
2. Panel Mounting Clamp Arrangement.
3. Ultrasonically welded ABS FR Grade Casing.
4. Light Weight .
5. Low Price.

S.R. No	Primary (Amp)	Secondary : 1 Amp & 5 Amp	
		Burden VA	Accuracy Class
1	1	2.5/5	0.5/1
2	2.5	2.5/5	0.5/1
3	5	2.5/5	0.5/1
4	10	2.5/5	0.5/1
5	15	2.5/5	0.5/1
6	20	2.5/5	0.5/1



RECO TRANSFORMERS
PVT. LTD.
LONAVALA - 410401.

PROJECTION



NAME :

ABS CASING BOX TYPE CT.

DRG. NO. :

REC-W01

DATE : 21/05/09. REV. : 0