




MAKE


**ABS CASING BOX TYPE BAR PRIMARY METERING CT.**

Type	ABS CASING BAR PRIMARY METERING CT.
Availability	ON ORDERING


General Specifications	
Standards	IS 2705, IEC 60044-1
Insulation Class	E ( 120° C )
Maximum Service voltage	0.66 kV
Frequency	50/60 Hz
Insulation Level : 3 kv for 1 minute	
S.T.C. Rating : 50 KArms For 1 Sec.	

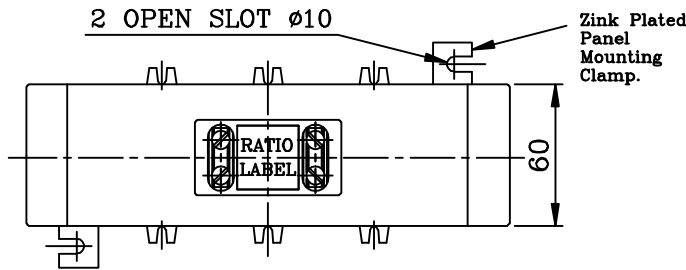

PLAN

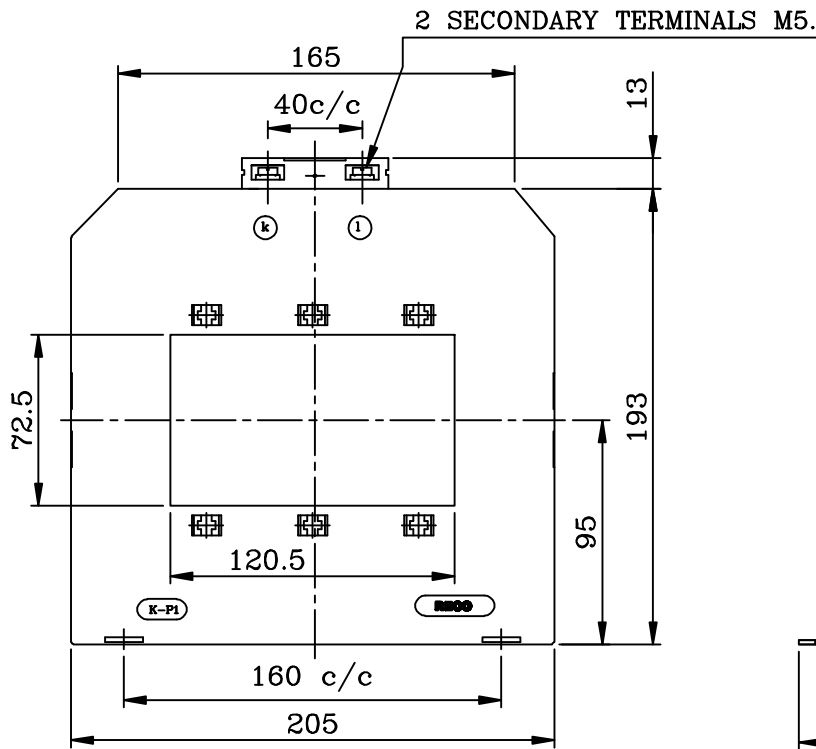

ELEVATION

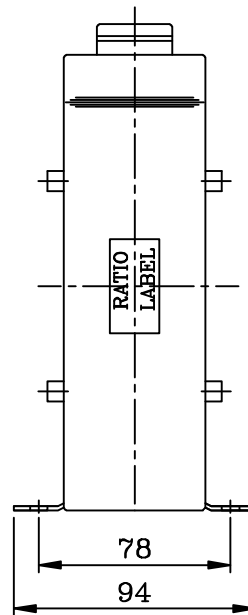

SIDE VIEW

S.R. No	Primary (Amp)	Secondary : 1 Amp & 5 Amp	
		Burden VA	Accuracy Class
1	1000	5/10/15	0.5/1/1
2	1200	5/10/15	0.5/0.5/1
3	1250	5/10/15/30	0.5/0.5/1
4	1500	5/10/15	0.5/0.5/1
5	1800	5/10/15	0.5/0.5/1
6	2000	5/10/15	0.5/0.5/0.5
7	2500	5/10/15/30	0.5/0.5/0.5/1
8	3000	5/10/15/30	0.5/0.5/0.5/1
9	4000	5/10/15/30	0.5/0.5/0.5/0.5
10	5000	5/10/15/30	0.5/0.5/0.5/0.5
11	6000	5/10/15/30	0.5/0.5/0.5/0.5

Features:


1. Panel Mounting Clamp Arrangement.
2. Cable / Busbar Holding Clamps.
3. Ultrasonically welded ABS FR Grade Casing.
4. Light Weight .
5. Low Price.

DATE : 21/05/09. REV. : 0



**RECO TRANSFORMERS**  
PVT. LTD.  
LONAVALA - 410401.

PROJECTION



NAME :  
**ABS CASING BOX TYPE CT.**

DRG. NO. : **REC-09**