




MAKE


**ABS CASING BOX TYPE BAR PRIMARY METERING CT.**

Type	ABS CASING BAR PRIMARY METERING CT.
Availability	ON ORDERING


General Specifications	
Standards	IS 2705, IEC 60044-1
Insulation Class	E ( 120° C )
Maximum Service voltage	0.66 kV
Frequency	50/60 Hz
Insulation Level : 3 kv for 1 minute	
S.T.C. Rating : 50 KArms For 1 Sec.	

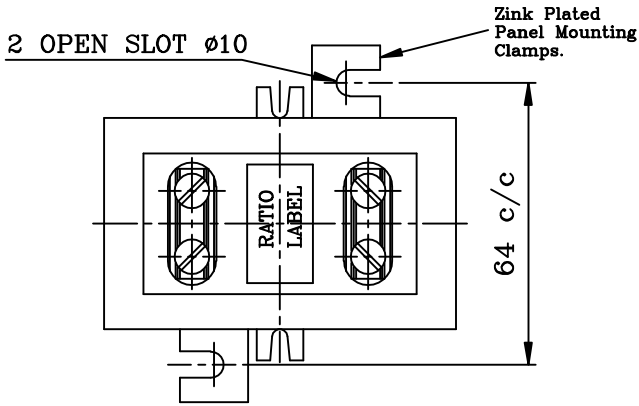

**PLAN**

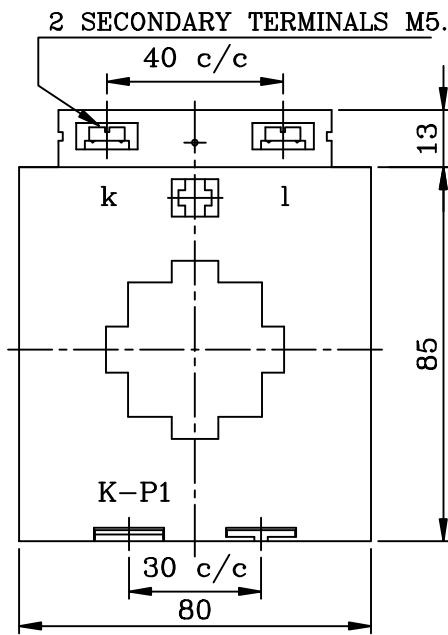

**ELEVATION**

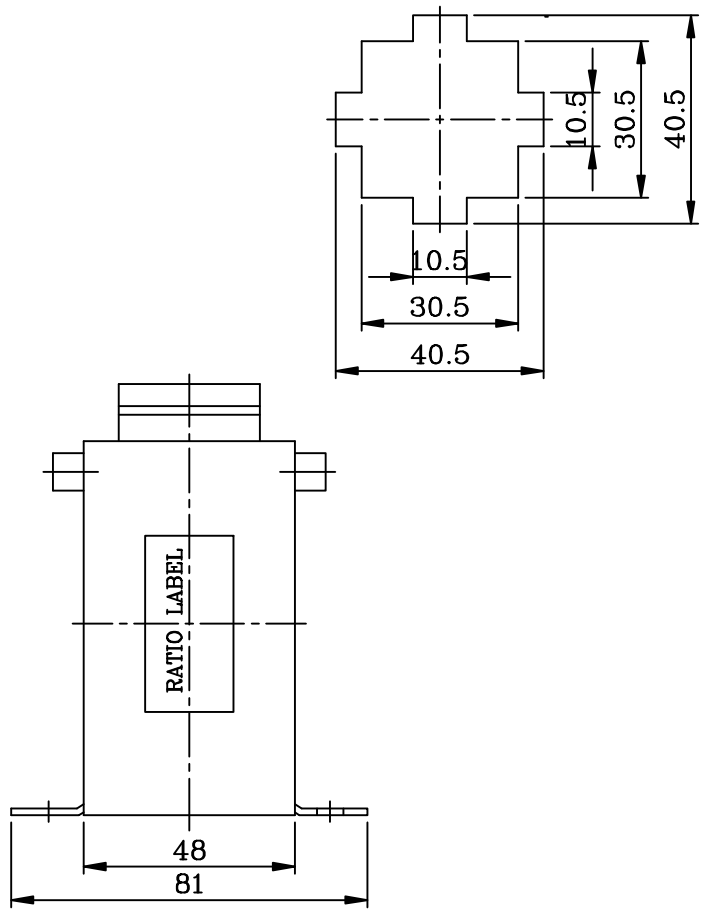

**SIDE VIEW**

S.R. No	Primary (Amp)	Secondary : 1 Amp & 5 Amp	
		Burden VA	Accuracy Class
1	50	1.5	1
2	60	1.5	1
3	75	1.5	1
4	80	1.5	1
5	100	1.5/2.5	0.5/1
6	150	1.5/5	0.5/1
7	200	2.5/5	0.5/1
8	250	2.5/5	0.5/1
9	300	5/15	0.5/1
10	400	5/15	0.5/1
11	500	5/15	0.5/1
12	600	5/15	0.5/1

**Features:**


1. Din Rail Fitting Arrangement.
2. Panel Mounting Clamp Arrangement.
3. Cable / Busbar Holding Clamps.
4. Ultrasonically welded ABS FR Grade Casing.
5. Light Weight .
6. Low Price.

DATE : 21/05/09. REV. : 0



**RECO TRANSFORMERS  
PVT. LTD.  
LONAVALA - 410401.**

PROJECTION



NAME : **ABS CASING BOX TYPE CT.**

DRG. NO. : **REC-04**