




MAKE


ABS CASING BOX TYPE BAR PRIMARY METERING CT.

Type	ABS CASING BAR PRIMARY METERING CT.
Availability	ON ORDERING


General Specifications	
Standards	IS 2705, IEC 60044-1
Insulation Class	E (120° C)
Maximum Service voltage	0.66 kV
Frequency	50/60 Hz
Insulation Level : 3 kv for 1 minute	
S.T.C. Rating : 50 KArms For 1 Sec.	

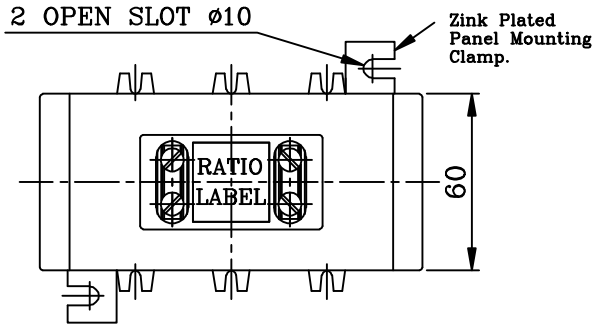

PLAN

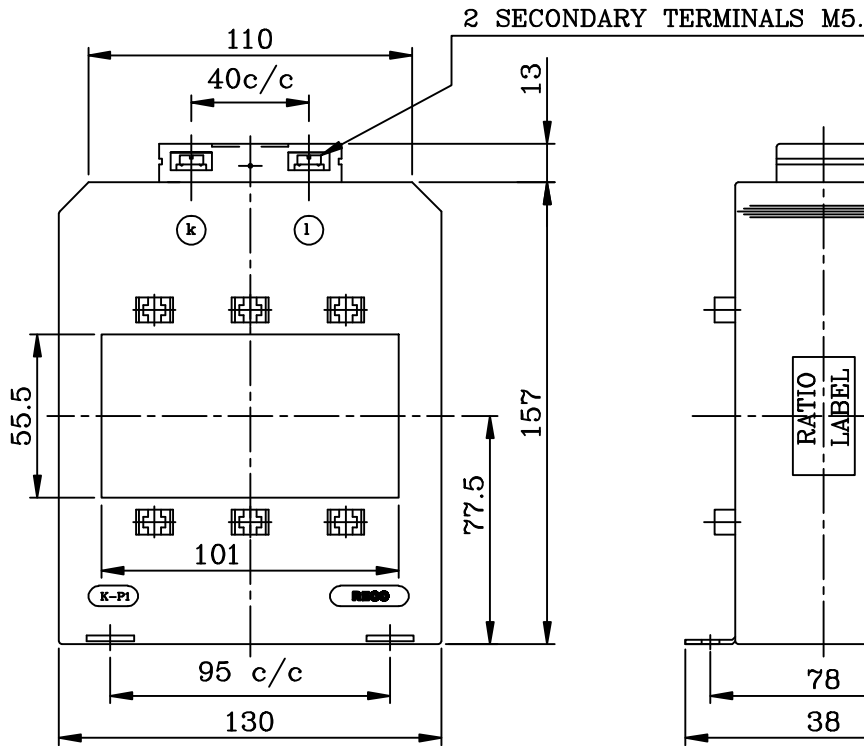

ELEVATION

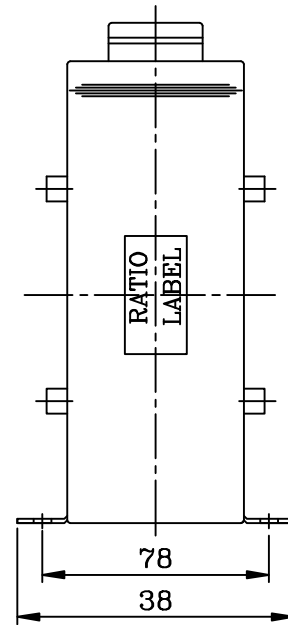

SIDE VIEW

S.R. No	Primary (Amp)	Secondary : 1 Amp & 5 Amp	
		Burden VA	Accuracy Class
1	1000	5 / 10 / 15	0.5 / 1 / 1
2	1200	5 / 10 / 15	0.5 / 0.5 / 1
3	1250	5 / 10 / 15 / 30	0.5 / 0.5 / 1
4	1500	5 / 10 / 15	0.5 / 0.5 / 1
5	1800	5 / 10 / 15	0.5 / 0.5 / 1
6	2000	5 / 10 / 15	0.5 / 0.5 / 0.5
7	2500	5 / 10 / 15 / 30	0.5 / 0.5 / 0.5 / 1
8	3000	5 / 10 / 15 / 30	0.5 / 0.5 / 0.5 / 1
9	4000	5 / 10 / 15 / 30	0.5 / 0.5 / 0.5 / 0.5
10	5000	5 / 10 / 15 / 30	0.5 / 0.5 / 0.5 / 0.5
11	6000	5 / 10 / 15 / 30	0.5 / 0.5 / 0.5 / 0.5

Features:


1. Panel Mounting Clamp Arrangement.
2. Cable / Busbar Holding Clamps.
3. Ultrasonically welded ABS FR Grade Casing.
4. Light Weight .
5. Low Price.

DATE : 21/05/09. REV. : 0



RECO TRANSFORMERS
PVT. LTD.
LONAVALA - 410401.

PROJECTION



NAME :

ABS CASING BOX TYPE CT.

DRG. NO. :

REC-08