




MAKE

ABS CASING BOX TYPE WOUND PRIMARY METERING CT.

Type	ABS CASING WOUND PRIMARY METERING CT.
Availability	ON ORDERING

General Specifications	
Standards	IS 2705, IEC 60044-1
Insulation Class	E (120° C)
Maximum Service voltage	0.66 kV
Frequency	50/60 Hz
Insulation Level : 3 kv for 1 minute	
S.T.C. Rating : 50x In KArms For 1 Sec. (In : Rated Primary Current.)	

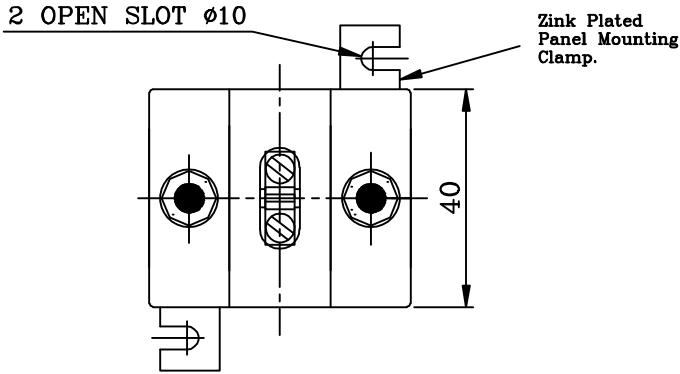


Primary Connection: Brass Bolt 8 mm


Brass Bolt 8mm

TOP VIEW

2 SECONDARY TERMINALS M5.

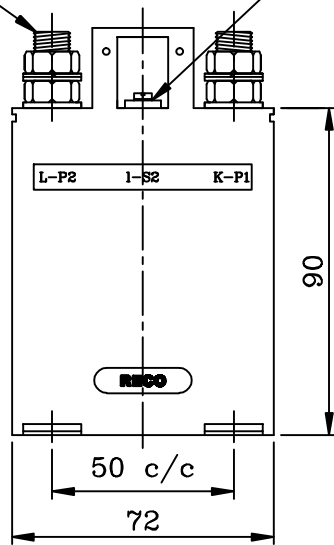

ELEVATION

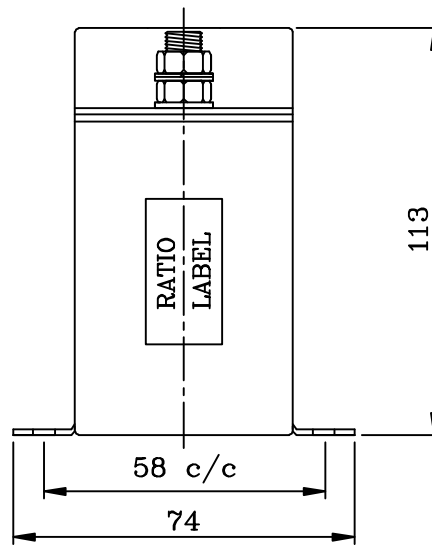

SIDE VIEW

S.R. No	Primary (Amp)	Secondary : 1 Amp & 5 Amp	
		Burden VA	Accuracy Class
1	1	5/10	0.5/1
2	2.5	5/10	0.5/1
3	5	5/10	0.5/1
4	10	5/10	0.5/1
5	15	5/10	0.5/1
6	20	5/10	0.5/1
7	25	5/10	0.5/1
8	30	5/10	0.5/1
9	40	5/10	0.5/1

Features:


1. Panel Mounting Clamp Arrangement.
2. Ultrasonically welded ABS FR Grade Casing.
3. Light Weight .
4. Low Price.

DATE : 21/05/09. REV. : 0



RECO TRANSFORMERS
PVT. LTD.
LONAVALA - 410401.

PROJECTION



NAME :

ABS CASING BOX TYPE CT.

DRG. NO. :

REC-W02